
EASY LIFE!







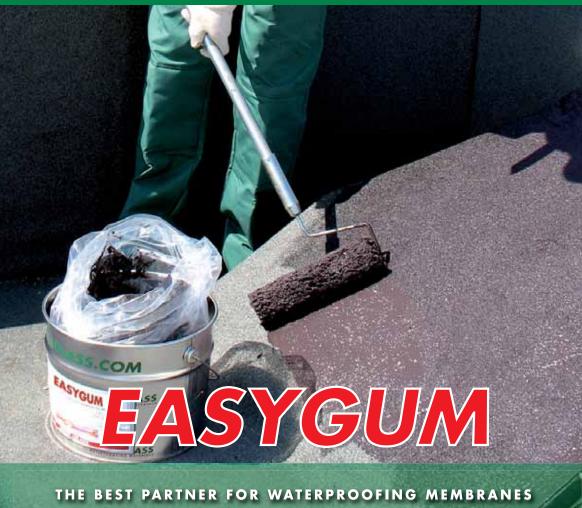

ECOLOGICAL WATERPROOFING LIQUID PRODUCT

EASY TO APPLY

SUITABLE FOR ALL TYPES OF SURFACE

AVAILABLE IN PAILS OR CARTRIDGES FOR BIG WATERPROOFING JOB AND DO IT YOURSELF







EASYGUM.COM





EASYGUM

A ready-to-use semi-dense thixotropic paste, made up of an emulsion of selected distilled bitumen, additives and special rubbers that give to the dried product excellent properties of waterproofing, adhesion, elasticity and resistance to atmospheric agents. EASYGUM, when perfectly dried, does not flow even in continuous contact with water, does not melt at high temperatures (resistance to heat >140 °C) and does not crack at low temperatures (cold flexibility -20°C).

A COMPLETE LINE OF LIQUID WATERPROOFING PRODUCTS QUALITY ASSURED BY NOVAGLASS

WATERPROOFING PRODUCTS



For solving all the problems related to a very fast execution of the works, where it is mandatory that the Primer dries in the shortest possible time in order to allow the immediate application of the waterproofing membrane. The exceedingly fast drying or RAPID PRIMER, only 5 minutes, avoids useless and expensive losses of time and assures higher safety on the job site. The high and uniform quality of the solvents used to manufacture the product, canfers to RAPID PRIMER a very limited smell. RAPID PRIMER adheres after evaporation of solvents, leaving a waterproofing film which does not flow at high temperatures or brittles at low temperatures.



Primer

Black paint based on a special oxidized bitumens and solvents. PRIMER adheres because of evaporation of solvents, which leaves a water-resistant film that does not flow at high temperatures and does not brittle at low temperatures.

OTECTIVE PAINTS



Vernice Alluminio

Special bituminous aluminium based paint with a high covering and reflective power. Provided with a high adhesion coefficient to every bituminous surfaces. VERNICE ALLUMINIO is an ideal protective paint for bituminous coatings. As known the colour black attracts more solar rays than any other one. This is why bituminous waterproof coatings, due to their colour, are subject to very high temperatures. Apart from causing problems for the underlying areas, these high temperatures expose the waterproof coating to significant physical stresses which, combined with the harmful effects of ultraviolet rays, shorten its lasting. Its peculiarity to reflect the solar rays assures the long life of waterproofing coatings and decreases the temperature in the underlying areas.



Colora

Special resinated, water based (non acrylic) paint, available in grey and red colours. Indicated for the protection of waterproofings made with bituminous membranes, COLORA can be applied on the membranes immediately after their application, without the need of the long interval of time required by the water based acrylic paints normally on the market. The application of COLORA, further to confer an excellent aesthetical effect, guarantee a longer lifetime to the waterproofing sheets.

SEALING PRODUCT



Special product obtained by mixing special bitumens, thermoplastic (SBS) elastomers and special additives having stabilising and protecting function on the structure. ELASTOGIUNTO maintains the sealing and waterproofing capabilities against the water both at the high and at the low working temperatures of the structures where it is used. ELASTOGIUNTO is designed to make external and internal horizontal joints. When the width of the joint exceeds 3 cm, it is possible to improve the stability of the compound adding dry sand. The outstanding characteristics of adhesion and elasticity of the material allow its use on the most various substrates, such as concrete, masonry, metal, wood, etc, after adequate preparation.

Information reported in this brochures are based on the present knowledge and experience of the producer.
Novaglass reserves the right to change, without notice, the technical characteristics in order to make the product more responding to the application requirements











NOVAGLASS s.r.l. Via Gattolè, 1 - 31040 Salgareda - TV - Italy Tel. +39.0422.8084 - Fax +39.0422.807655 e-mail: info@novaglass.com